


ZELA Surface Mount Fixed 1

décor

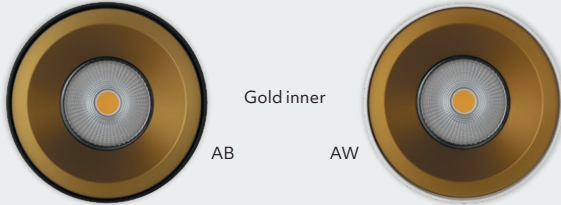

Gold inner

AB


AW



Copper inner

CB


CW

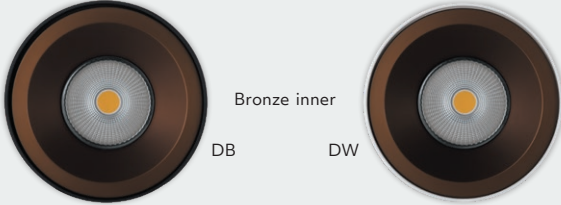

Bronze inner

DB


DW

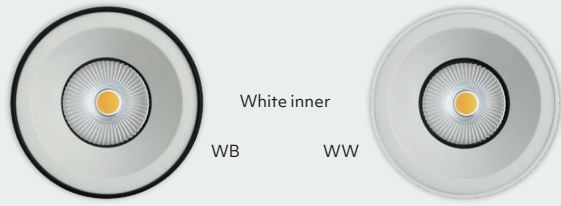

White inner

WB

WW

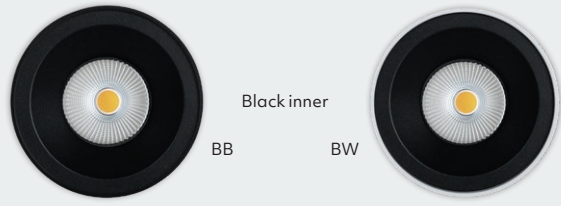

Black inner

BB

BW



SLSM101F
Beam 40° 55°

Feature lighting



SLSM104F
Lens
Beam 9° 15° 20°
Spot lighting



SLSM106F
Honeycomb
30° 40°
Anti-glare lighting



SLSM100F
Clear glass
Beam 40° 55°
Task | General lighting




SLSM101F
Prismatic diffuser
Beam 40° 55°
General | Task lighting



SLSM103F
Opaque diffuser
Beam 90°
Wide angle lighting

ZELA décor Surface Mount Fixed 1

- + recessed for low glare
- + anodised inner with colour options
- + excellent beam designs
- + IP20

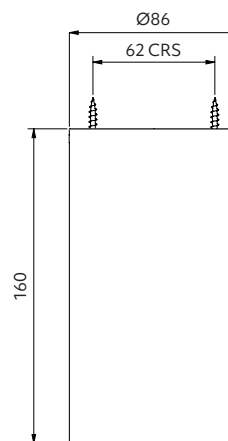

Options

Beam angle



9° 15° 20°

Lens



30° 40° 55° 90°

Honeycomb Clear glass Prismatic Opaque


Trim colour

Textured white
RAL 9016
Textured black
B104

Inner colour

Textured black
Gold
Bronze
Plated copper
Textured white

CCT

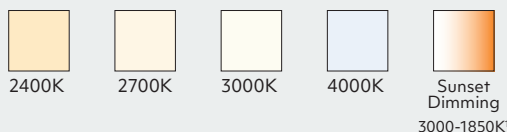

¹ Sunset Dimming is available in 30°, 40° and 55° in Professional series.

CRI

Professional series (P) CRI 90-94 Art series (A) CRI 95-98

Driver

Phase cut dim (standard)
DALI 2 Dimming
SLiC Casambi Dimming

Product information

(example: Clear glass, 40°, 3000K, CRI 90, phase cut driver)

Driver (mA)	Power (W)	Delivered lumens (lm)
150	6.4	580
260	11.1	900



Size
86x160mm

how to specify ZELA décor Surface Mount Fixed 1

Please confirm model option availability from our website. **Not every combination is compatible.**

e.g. code = **SLSM101F-4030P-BWD45**

Model	Beam	CCT	CRI	Colour - Inner / Trim	Driver - Phase cut*	Market
SLSM104F = Lens	09 = 9° 15 = 15° 20 = 20°	24 = 2400K 27 = 2700K 30 = 3000K 40 = 4000K SD = Sunset Dimming	P = 90-94 A = 95-98	AW = gold / white BW = black / white EW = copper / white DW = bronze / white WW = white / white AB = gold / black BB = black / black EB = copper / black DB = bronze / black WB = white / black	D45 = 150mA (6.4W) D46 = 260mA (11.1W)	1 = NZ 1 = Aust 2 = UK 3 = EU
SLSM106F = Honeycomb	30 = 30° 40 = 40°					
SLSM100F = Clear glass SLSM101F = Prismatic	40 = 40° 55 = 55°					
SLSM103F = Opaque	90 = 90°					

Please see www.switch-lighting.co.nz for full specifications, lux levels, SDOcs, ies files and installation instructions.



Warranty
7yr Luminaire
5yr Driver

L70 (60,000 h)

