

Black Pearl shower system specification

BLACK PEARL™ SHOWER TRAY

- One-piece tray manufactured from tough FRP with an acrylic surface for durable performance.
- Structurally strong across entire base and outlet – will not deflect or compress.
- Built-in outflow gradient ensures optimum water flow to outlet. Minimum 12mm fall to outlet.
- Wall junction upstand 100mm high.
- Base height 26mm from floor to top of base.
- Waste outlet is located at rear on most sizes, 175mm from rear wall. Some sizes have centre-located waste option.
- Standard sizing only.
- Weight: 21kg/m².
- 7 years leak-free and durability warranty.

SHOWER WALL – OPTIONAL

Acrylic wall liner or Ellure™ tile look wall.

WATERPROOFING

- Optional-Essential Connection Waterproofing Tapes available for the secure connection of the wallboard to the base upstand and from the base perimeter to the floor.
- Compatible with all compliant liquid waterproofing products.

SCREENS

Fully-frameless Screens

- Satin anodised wall glass receiver channels incorporate mechanical glass locking system and are machined to lock with base channels.
- 8mm toughened safety glass at 1930mm high.

WASTE FITTING

- Waste fitting 40mm easy clean waste with side outlet and chrome over brass lid.
- 5 year manufacturer's warranty.

HARDWARE

- Polished stainless steel door handles supplied with all systems. E handle standard. Upgrades available.
- Adjustable bracing system – catering for uneven walls, incorporating up to 10mm installation tolerance.
- Chromed, solid brass self centering hinges.


INSTALLATION

Atlantis recommends installation of Black Pearl™ showers is undertaken by a qualified shower installer. See website or call 0800 428 526 for more details.



Illustration of 2-walled shower showing hinged door.

BASE PROFILE STEP ENTRY ON ANY FLOOR STRUCTURE

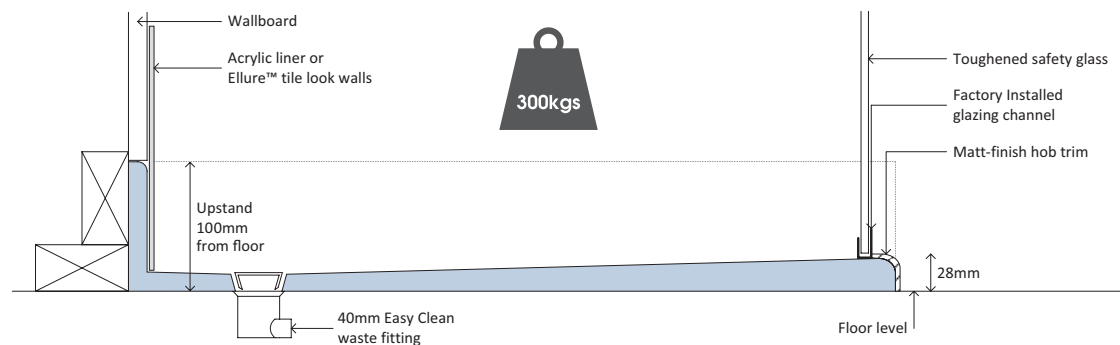

Specifications subject to change without notice. Please check www.atlantis.net.nz for latest version.