

CIRRO Ceiling Washer




Textured white



Textured black

CIRRO Ceiling Washer

- + indirect uplight
- + semi-recessed wall mounted
- + beautiful ambient lighting
- + highlight timber ceilings

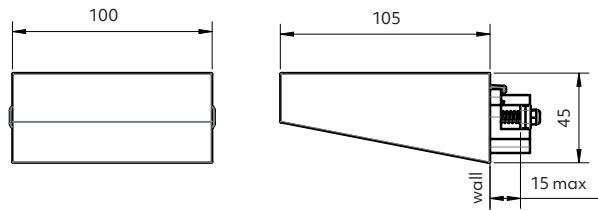

Options

Beam angle



Wide angle

Diffuser

Matt

Trim colour



Textured white
RAL 9016



Textured black
B104

CCT



2400K



2700K



3000K



4000K



Sunset
Dimming
3000-1850K



Tunable
white
4000-1800K

CRI

Professional series (P) CRI 90

Art series (A) CRI 97

Driver

Phase cut dim (standard)

DALI 2 tunable white (TW) / Dimming

SLiC Casambi TW / Dimming

Product information

(example: 3000K, CRI 90, D12 phase cut driver)

Driver (mA)	Power (W)	Delivered lumens (lm)	Insulation coverable		
			NZ	AU	UK/EU
300	13	760	IC-F	IC-4	✓



Size
100x45x130mm



Cut-out
89x35mm



Hole depth
>70mm*



IP40



Max wall thickness
15mm

Please note: it's important to use the ceiling washer correctly to maximise your lighting.

For example: the quantity needed and the maximum distance between lights.

We recommend that you speak to one of our lighting consultants to help with your lighting design.

how to specify ZELA Cirro Ceiling Washer

Please confirm model option availability from our website. **Not every combination is compatible.**

e.g. code = **SLCW100F-W130P-TBD12**

Model	Beam	CCT	CRI	Colour	Driver	Market
SLCW100F = Matt	W1 = Wide angle	24 = 2400K 27 = 2700K 30 = 3000K 40 = 4000K SD = Sunset Dimming S2 = Tunable white	P = 90 A = 97	TW = Textured white TB = Textured black	D12 = 300mA (13W) D05 = 300mA (13W) (DALI) D65 = 300mA (13W) (Casambi dimming) D44 = 260mA (12W) (DALI 2 TW) D54 = 260mA (12W) (Casambi TW)	<ul style="list-style-type: none"> 1 = NZ 2 = Aust 3 = EU

Please see www.switch-lighting.co.nz for full specifications, lux levels, SDoCs, ies files and installation instructions.



Warranty
7yr Luminaire
5yr Driver

L70 (60,000 h)

